aspire

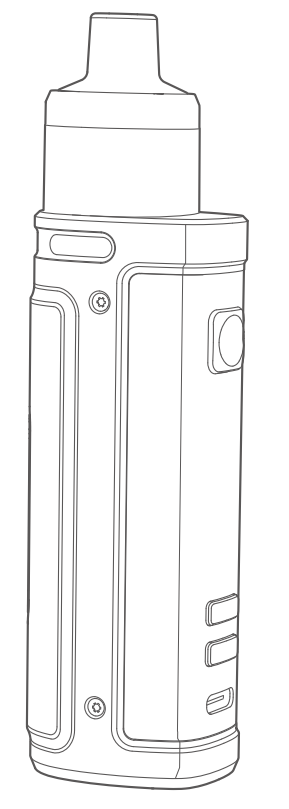

VEYNOM LX

User Manual

EN

DISCLAIMER
Please read this user manual before use. Failure to follow the instructions for proper setup, use, and care for your device can increase the risk of serious personal injury, death, or property damage.

The manufacturer assumes no responsibility for any damage caused by mishandling that is beyond normal usage defined in this manual.

RECOMMENDED SETUP
We recommend the exclusive use of Aspire original charger, battery, components, and accessories indicated on the product page and leaflet. Use of chargers, batteries, components, and/or accessories not specifically produced for this device may lead to malfunction and/or damage to the product and to the cancellation of the warranty.

HANDLING AND USAGE SAFETY
To reduce the risk of fire, shock, or damage to your vape device keep the product and its accessories away from overheated or excessively humid conditions (-5° C / 50 ° C).

Your device can be damaged if dropped, burned, punctured, crushed, or if it comes in contact with liquid. If you suspect damage to your device or its battery, discontinue use of your device, as it may cause overheating or injury.

To avoid misfiring always ensure you either lock or switch off your device when it is not in use, especially when carrying your device in your pocket, bag, or purse.

In the case of burnt or abnormal deformation of one of the components of the device or its accessories, stop using it immediately and contact Customer Care.

COIL MAINTENANCE SAFETY
In order not to damage the coil or burn the cotton do not inhale an empty pod. Let the pod/tank stand for 5 minutes after filling so the cotton can be saturated with e-liquid before use.

REPLACEABLE BATTERIES SAFETY
Do not use non-rechargeable batteries. Do not use damaged batteries or batteries with a torn or damaged wrapper. Disconnect the battery from the charger when fully recharged. Do not use your vape device while charging.

PRODUCT DISPOSAL SAFETY
Do not discard this product and battery in the environment, and only dispose of the product components at dedicated collection/disposal points.

HEALTH WARNING SAFETY
Do not use the product if you are pregnant, breastfeeding, generally ill, or suffer from respiratory and/or cardiovascular system disorders.

If you experience any side effects discontinue using the product, if the effect(s) continue after you stop using, consult a healthcare professional immediately.

Package Contents:
1 * Veynom LX Device
1 * Veynom Pod
1 * BP Meshed Coil 0.15Ω / 60-80W (preinstalled)
1 * BP Meshed Coil 0.3Ω / 30-40W
1 * Type-C Cable
1 * User Manual

Components View:

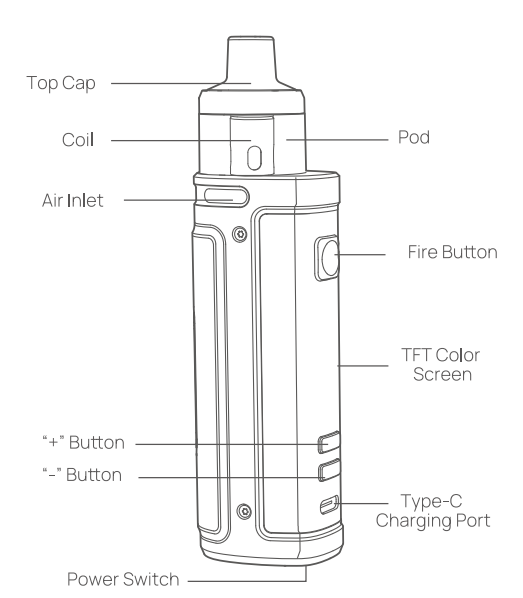

Kit Dimensions: 129.6*34*28 mm

Pod Specifications:
Pod Capacity: 2.0 ml
E-liquid Filling: Screw-to-open top fill
Airflow: Rotate to adjust airflow

Coil Compatibility:
Compatible with BP series coils
- BP Pro Meshed Coil - 0.15Ω (80-100W)
- BP Meshed Coil - 0.15Ω (60-80W)
- BP Meshed Coil - 0.17Ω (45-55W)
- BP Meshed Coil - 0.3Ω (30-40W)
- BP Meshed Coil - 0.4Ω (25-35W)
- BP Coil - 0.6Ω (15-25W)
- BP Coil - 1.0Ω (10-16W)

Dimensions (Including drip tip): φ26.5*43.5 mm

Device Specifications:
Battery Capacity: Built-in 3200 mAh battery
Output Modes: AUTO / WATT / VOLTAGE / BYPASS / TC / CPS
Output Wattage Range: 1-100W
Output Voltage Range: 0.5-9.0V
Adjustable Temperature Range: 200-600°F / 100-315℃
Supported Resistance: 0.08-3.5Ω
Continuous Fire Time: 10s
Screen: 0.96" TFT color screen
Charging Port: Type-C
Max Charge Current: 2A
Dimensions: 96.2*34*28 mm

Coil Replacement:
1. Pull to remove the pod
2. Pull the used coil out
3. Push the new coil into the pod
4. Place the pod back

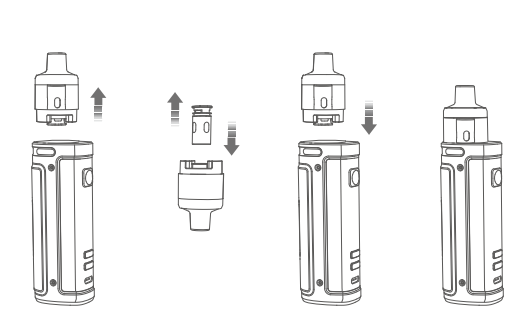

Pod Filling:
1. Remove the top cap by firmly unscrewing it
2. Add e-liquid
3. Firmly screw the top cap back

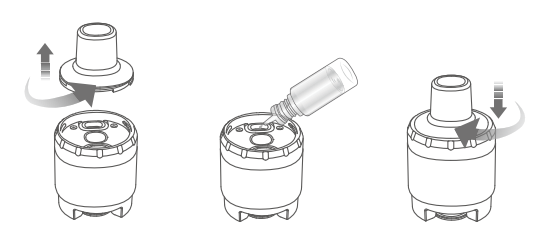

Remember to clean the condensation between the pod and the device.

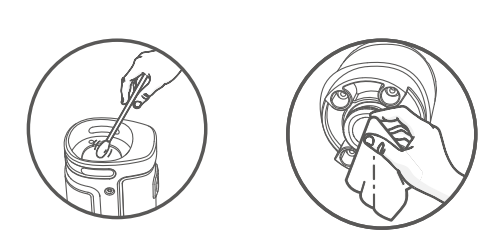

Instructions:

Device Condition	Status of Indicator Light & Details	
Turn on / off	Toggle the power switch at the bottom to "ON", the device will display "aspire" for 3s	aspire
	Toggle the power switch at the bottom to "OFF", the device will display "SHUT DOWN"	SHUT DOWN
Lock or unlock "+" & "-"buttons	Press the "+" & "-" buttons simultaneously to lock or unlock the buttons. When the "+" & "-" buttons are locked, only the fire button and power switch work	
Lock or unlock the device	Press fire button 3 times continuously, the device will display "LOCKED" for 3s and enter dormant states. (Only turn on / off function allowed in this state)	LOCKED
	Press fire button 3 times continuously when the device is locked, the device will display "UNLOCKED" for 3s and enter the main interface	UNLOCKED
	When charging the device under dormant state and the screen is off, press any button once, the device will display charging interface, press any button again, the device will display "LOCKED"	LOCKED
Screen brightness and light effect adjustment	Press fire button and "-" button simultaneously at the main interface to enter the screen brightness and light effect adjustment interface, press fire button once to switch between screen brightness adjustment and light effect adjustment, then press "+" / "-" button to adjust the screen's brightness among 33 levels or the light effect among 7 models How to confirm the current setting? 1. Long press the fire button 2. Wait for 3 seconds 3. Press fire button and "-" button simultaneously	
Battery level indicate on screen	Voltage<3.3V(0%) – empty level	
	Voltage=3.3V-3.5V(0-20%) - one level	
	Voltage=3.5V-3.75V(21-40%) – two level	
	Voltage=3.75V-3.9V(41-60%) – three level	
	Voltage=3.9V-4.05V(61-80%) – four level	
	Voltage=4.05V-4.2V(81-100%) – five level	

Parameters Setting:
Step 1: Enter the main interface, the screen will display "BATTERY LEVEL", "MODE", "WATTAGE", "VOLTAGE", "CURRENT", "RESISTANCE" and "PUFFS".
Step 2:
* Press fire button and "+" button simultaneously to enter the menu adjustment.
* Immediately press fire button to switch the menu adjustment from top to bottom.
* Press "+" / "-" button to select the output modes among AUTO, WATT, VOLTAGE, BYPASS, CPS, and TC-NI / TC-TI / TC-SS.
* Long press the fire button or wait 4 seconds to confirm and keep the settings.

Setting:

Mode	Adjustment range	Operation and value setting	
AUTO	The device will automatically detect the coil resistance and show the optimal wattage by default, and the output wattage can be adjusted and can't be higher than the maximum wattage that the coil can support.		
WATT	1-100W (Default: 5W)	Press "+" / "-" button	0.5W up / down per adjustment
VOLTAGE	0.5-9.0V (Default: 4.65V)	Press "+" / "-" button	0.01V up / down per adjustment
BYPASS	The device will output the most the mod can do with the resistance of the coil on it.		
CPS	1-100W (Default: 10W)	When "CPS" flashes then press fire button to select from the P1/P2/P3/P4/P5	
		Under P1/P2/P3/P4/P5 mode Press "+" / "-" button	0.5W up / down per adjustment
TC	200-600°F/ 100-315℃ (Default: 200°F)	Press "+" / "-" button	1°C / 1°F per adjustment
		Press "-" button at 100℃	It will switch to 600°F
		Press "-" button at 200°F	It will switch to 315℃
		Press "+" button at 315℃	It will switch to 200°F
		Press "+" button at 600°F	It will switch to 100℃

Note: The device will display "NEW ATOMIZER" only under the TC mode when the coil is connected to the mod.

Under any mode, when switching to "Puff", press "-" button, the puffs will return to the default value of 0000, and will only update present vaping puffs if you vape; press "+" button, the puffs will display the puff value of last time.

Safety Features:

Vaping Over-Time Protection (10s)	The screen will display "10S OVER TIME"
Open Circuit Protection	The screen will display "CHECK ATOMIZER"
Short Circuit Protection	The screen will display "ATOMIZER SHORT"
Low Resistance Protection	The screen will display "LOW RES"
Low Voltage Protection	The screen will display "LOW BATTERY"
Overcharge Protection	The device will stop charging
Over Heat Protection	The screen will display "TOO HOT"
Abnormal Charge Protection	The screen will display "CHECK USB"

Charging:

Maximum charge current	2A
Recommended charge voltage	5V
Attach the type-C cable	The screen will display a growing battery icon
Fully charged	The screen will be on for 10S and then shut off
The charging voltage is over 6V or lower than 4.2V	The device will stop charging and the screen will display "CHECK USB" for 3s
If you press the fire button while charging, the battery will stop charging to ensure safety	

IMPORTANT INFORMATION ABOUT USING NICOTINE-CONTAINING E-LIQUIDS

Before using nicotine-containing e-liquid the user should read the following information carefully.

1. NICOTINE CONTAINING E-LIQUID
If used with nicotine-containing liquid, it should be noted that nicotine which is a highly addictive substance and, therefore, is not recommended for use by non-smokers may produce toxic effects if consumed orally, especially in infants or children.
Do not use if you are allergic to nicotine or any of the other ingredients contained within the e-liquid (see manufacturer's label for full details).

2. NICOTINE WARNINGS AND PRECAUTIONS
Nicotine-containing e-liquid is not recommended for:
- Non-smokers;
- Young people under the legal age;
- Pregnant or breast-feeding women; as nicotine is known to cross the placenta and to be excreted in breast milk;
- Those experiencing general ill health; such as heart disease, stomach, and duodenal ulcers, liver or kidney problems, long term throat disease, or difficulty breathing due to bronchitis, emphysema, or asthma;
- Those who have an overactive thyroid gland or have a pheochromocytoma (a tumor of the adrenal gland that can affect high blood pressure);
- Those who have diabetes, nicotine may affect your blood sugar levels;
- Those taking the following medication:
  - *Theophylline (to treat breathing problems)
  - *Ropinirole (to treat restless leg syndrome)
  - *Clozapine (to treat schizophrenia)

3. POSSIBLE SIDE EFFECTS
If you inhale too much nicotine or use the product too much you may experience one or more of the following effects:
- Feeling faint
- Nausea (feeling sick)
- Headache
- Coughing
- Irritation of the mouth or throat
- Dizziness
- Stomach discomfort
- Hiccups
- Nasal congestion

WARRANTY

Please visit our official website below to know our warranty policy and find an official after-sale support center in your country:
https://www.aspirecig.com/support/service-center/

If your region doesn't have a support center, you can contact the retailer for service as normal.

Important Information:
When requesting for warranty claims, kindly provide receipts or invoice purchased from vendor. Please also keep the original box containing the serial number and security code, or batch code for verification.

For detailed operating instructions, please visit:
Manual: https://www.aspirecig.com/support/download
Video: https://www.youtube.com/c/Aspirecigs

Ø 2.2 mm *Diameter of the pod refill hole.

Shenzhen Eigate Technology Co., Ltd.
Floor 1-4, Building 3, No.14 Jian'an Road, Shajing Sub-district,
Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86-755-81499783
Email: service@aspirecig.com
To learn more about our products and how to use, please visit:
www.aspirecig.com

Manufactured by Eigate
MADE IN CHINA